

NEW HOLLAND T3000

T3010 | T3020 | T3030 | T3040



Power and performance in a compact frame.

Affordable tractors with low whole life operating costs

Designed to meet the needs of the smaller farming business, specialist growers, estate owners and municipalities, the New Holland Series T3000 compact tractor range combines rugged build and ease of operation with modern ergonomics, advanced styling and excellent operator comfort.



A choice to suit every budget

Four T3000 models are available, the T3010, T3020, T3030 and T3040.

All offer established New Holland performance features that include 4WD with an outstanding 55 degree turn angle, a two-speed 540/540 Economy PTO and a generous 1200kg rear linkage lift capacity. A 16x16 30kph creep speed transmission is standard, offering operating speeds down to 250m/h.





Comfort comes as standard

The operator platform, or cab where specified, is mounted on tuned rubber isolation blocks to reduce heat and vibration reaching the driver. Combined with the standard high comfort seat, this feature makes T3000 tractors among the most comfortable models in their class.

All round visibility is excellent.

A forward mounted ROPS frame is fitted to platform models, while cabbed versions benefit from wide, fully glazed doors and large windows.


Advanced design

The under hood muffler and air intake ensure visibility over the sloping hood is unrestricted. The ROPS frame can be completely lowered so that it does not impair forward visibility. This is not only important to customers specifying a front linkage and PTO system, but also to those working in orchards or vineyards where the smooth tractor profile reduces the chance of crop damage. Even the direction indicators fold back out of the way.



Advanced, affordable and versatile.

T3030 curves

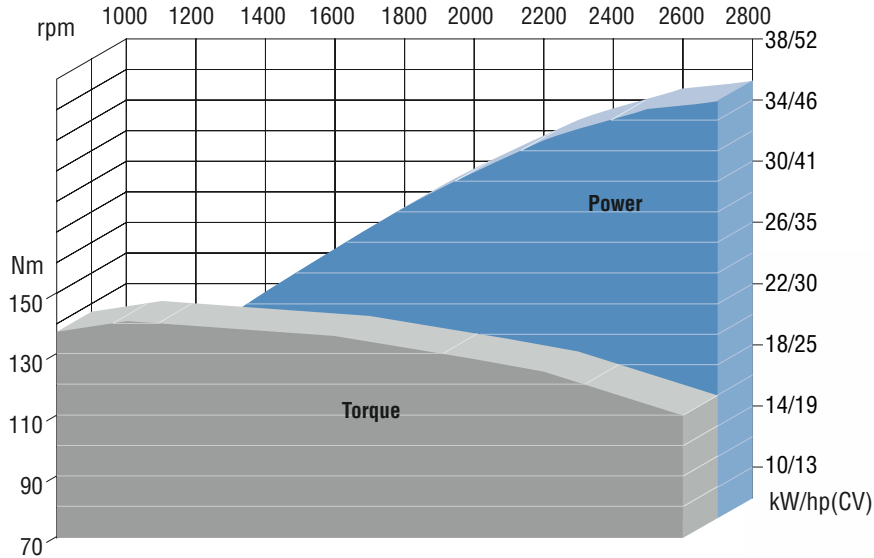

Clean, quiet and powerful

The T3010 is powered by a liquid cooled 1642cc three-cylinder diesel engine that develops 35.3hp(CV) maximum and 108Nm at 1200rpm. The T3020 and T3030 have liquid cooled 1995 and 2189cc four-cylinder engines producing 43.5 and 47.7hp(CV) maximum and 129 and 141Nm of torque 1400 and 1200rpm respectively. The T3040 model features a 1995cc four-cylinder turbocharged 16-valve engine developing 54.4hp(CV) maximum and 162Nm of torque at 1600rpm.

Beautifully hard working

The smooth and stylish lines of Series T3000 tractors go beyond good looks. The rounded fenders offer the operator a clear and uninterrupted view to the rear. The sloping engine hood provides a clear view to the front and sides. Of equal importance, T3000 tractors can gently brush past high value trees and fruit crops, reducing the chance of damage.





Economical to run

Despite offering advanced features and a modern design, Series T3000 tractors are built to meet the needs of users looking for a tractor with low whole life operating costs. This is achieved by ensuring only the highest quality components are used in the production of these outstanding tractors.



Easy to look after

New Holland has made Series T3000 models simple to maintain. The one-piece engine hood opens to provide full access to the engine and major service components, so all daily checks can be carried out quickly. The engines in all models have a 250 hour or 12 month service interval, with a more comprehensive service only being required every 1000 hours. All routine maintenance, such as checking and cleaning the air filter, can be carried out without tools.

Compact size, big specification.



Flexible transmission for every need

New Holland has researched customer requirements to help ensure that the 16x16 creep speed transmission offers a working speed to match all applications, with four ratios in each of the four working ranges. This enables operations such as specialist planting or intensive low speed cultivation, to be carried out at forward speeds as low as 250m/hr. Fully locking differentials are fitted in both axles.

Turn tighter for greater productivity

New Holland tractors are recognised as offering class-leading manoeuvrability. Series T3000 is no exception. Fitted with high clearance portal front axles, without the restriction of a traditional CV drive coupling, the front wheels turn through a massive 55 degrees.



Versatile PTO with economy setting

All models are fitted with 540, 540 economy and Groundspeed PTO as standard. A 1000rpm front PTO is also available. In low power applications, the 540 economy speed enables the operator to run the tractor at a lower engine speed to reduce fuel consumption. This means that these compact and versatile tractors can operate a wide range of equipment economically.

High capacity hydraulics with power to spare

Delivering a genuine 28 litres/min hydraulic flow rate, with a dedicated 11 litres/min for the power steering and ancillary circuits, Series T3000 tractors have ample capacity to handle the most power hungry attachments, including loaders and backhoes. Two remote valves are fitted as standard and a third is available. The rear Cat I three-point linkage has 1200kg lift capacity. A Cat I N front linkage, offering 400kg lift capacity, can be specified.

It is the design that makes T3000 such great value.

Style and comfort in any climate

In conditions where the year round comfort of a cab is required, Series T3000 sets new standards in the compact tractor class. Wide, fully glazed doors combine with the low platform to provide easy access. The cab is mounted on tuned rubber isolation blocks to optimise operator comfort.

A cab for all seasons

Warmth in winter is assured by the high output heating system, whilst in summer the cab can be cooled by the three-speed blower. Full cab ventilation can be achieved by opening the front and rear windows. Air conditioning is available on T3020, T3030 and T3040.



Class leading ergonomics

All Series T3000 models benefit from carefully designed controls. Both the seat and steering wheel adjust to suit the driver, helping to reduce fatigue. Where ease of operation is a priority, Series T3000 tractors are the models to choose.

Putting the operator at the centre of operations

Both platform and cabbed Series T3000 tractors benefit from operator focused design. The stylish bonnet slopes to provide excellent forward visibility. Where fitted, the ROPS frame is positioned ahead of the driver to optimise the view to the sides.



Big tractor features and comfort

The spacious cab is fully glazed to offer 360° visibility. Finished in high quality materials, the cab is radio ready, has front and rear wipers with integral screen wash and four additional work lights.

New Holland. Understanding your day to day needs.

A loyal partner

It is well known that New Holland offers you, the customer, a range of technically advanced products. Together, we can help you improve productivity and profitability. We listen to what you want. New technology enables you to make the most economic and productive use of the machines we manufacture. Design evolution offers you proven solutions for your current and future needs. This New Holland approach enables you to have access to the latest technology.

The local link

There are a great number of New Holland dealers around the world and they have one thing in common. They are your natural first port of call for information and advice. They are there to provide you with the equipment you need and the support you deserve.

Tailored finance packages

Through your dealer, we can help you plan and finance the purchase of your new equipment.

A comprehensive range of New Holland finance packages is available to match your cash flow and optimise the investment of your capital.



Original accessories

New Holland is a global brand. To maximise performance in differing world wide working environments, a comprehensive range of original accessories has been developed for Series T3000.

These can be obtained from and fitted by your local dealer.




Trained technicians, parts ready on the shelf

We also understand the value of after sales service and support. Your dealer is able to meet the service and maintenance needs of all your New Holland equipment. Your dealer carries a comprehensive range of spare parts for both current and older machines. Extended warranty packages and service contracts are also available.



		T3010	T3020	T3030	T3040
Engine					
Type		Yanmar	Yanmar	Yanmar	Yanmar
Max Power ISO TR14396 - 2000/25/EC	[kW/hp(CV)]	25.9/35.3	31.9/43.5	35/47.7	39.9/54.4
Rated speed	(rpm)	2800	2800	2800	2800
Maximum torque ECE R24 at engine speed	(Nm / rpm)	108.4 / 1200	129 / 1400	141 / 1200	162 / 1600
Cylinders / Aspiration	(n°)	3 / NA	4 / NA	4 / NA	4 / Turbo
Capacity	(cc)	1642	1995	2189	1995
Water cooling		●	●	●	●
Fuel tank capacity	(l)	40	40	40	40
Transmission					
Clutch diameter	(mm)	225	225	225	225
Standard creeper transmission		16x16	16x16	16x16	16x16
Shuttle type		Synchro	Synchro	Synchro	Synchro
Max speed	(kph)	30	30	30	30
Front axle					
Four wheel drive (4WD)		●	●	●	●
Wheel turn angle	(degrees)	55	55	55	55
Mechanical 4WD engagement		●	●	●	●
Electro-hydraulic differential lock	(front / rear)	●	●	●	●
Rear hydraulic lift & PTO system					
Draft control		Mixed	Mixed	Mixed	Mixed
Rear lift capacity at ball ends	(kg)	1200	1200	1200	1200
Category 1 linkage		●	●	●	●
Max rear remotes		3	3	3	3
Rear PTO 540 / 540E		●	●	●	●
Front hydraulic lift & PTO system					
Front lift capacity at ball ends	(kg)	400	400	400	400
Category 1 linkage		○	○	○	○
Fixed type link ends		○	○	○	○
Front PTO 1000rpm		○	○	○	○
Operator's platform					
Suspended on rubber "silent blocks"		●	●	●	●
Deluxe seat		●	●	●	●
Cab (when specified)- as above, plus					
Heating and ventilation system		●	●	●	●
Air conditioning		-	○	○	○
Opening front and rear screens		●	●	●	●
Dimensions					
A - Wheelbase	(mm)	1700	1700	1700	1760
B - Front wheel track settings	(mm)	1016 / 1304	1107 / 1357	1107 / 1357	1107 / 1357
C - Rear wheel track settings	(mm)	1004 / 1192	1032 / 1262	1032 / 1262	1032 / 1262
D - Minimum overall width	(mm)	1322	1380	1380	1380
E - Minimum overall height - ROPS	(mm)	1900	1930	1930	1930
E - Minimum overall height - Cab	(mm)	2110	2140	2140	2140
F - Length with ballast	(mm)	3300	3300	3300	3360
Weight - ROPS	(kg)	1450	1460	1460	1480
Weight - Cab	(kg)	1600	1610	1610	1630

● Standard ○ Option at extra cost - Not available

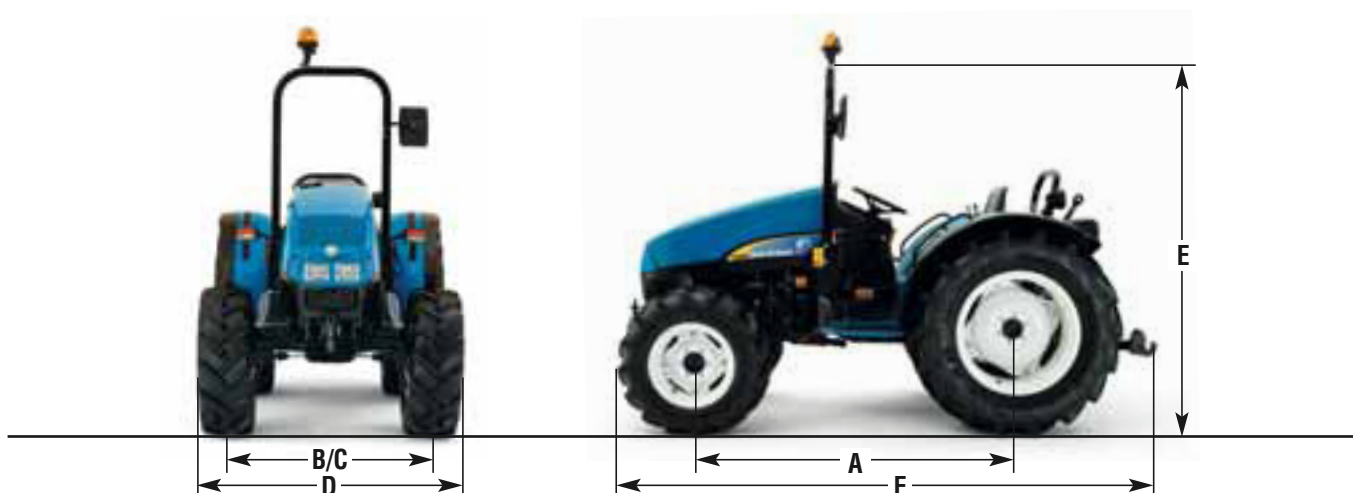

Managed in close partnership with New Holland dealers and New Holland Parts and Service Teams, New Holland Top Service is:



TOP AVAILABILITY.

We are always there for you: 24/7, all year round! Whatever information you need, whatever your problem or request, all you have to do is call the New Holland Top Service toll free number*.



TOP SPEED.

Express parts delivery: when you need it, where you need it!



TOP PRIORITY.

Fast-track solution during the season: because your harvest can't wait!



TOP SATISFACTION.

We drive and track the solution you need, keeping you informed: until you are 100% satisfied!



TOP SERVICE
00800 64 111 111

* Calls to the Top Service team are free from landlines in the United Kingdom and Republic of Ireland. UK-based mobile calls are also free, but Republic of Ireland mobile users should call **01 2421881** and this will be charged at your standard network rate.

For more details, ask your New Holland dealer!

AT YOUR OWN DEALER



Your success - Our specialty

Visit our web site for UK: www.newholland.com/uk - for ROI: www.newholland.com/ie

The data indicated in this folder are approximate. The models described here can be subjected to modifications without any notice by the manufacturer. The drawings and photos may refer to equipment that is either optional or intended for other countries. Please apply to our Sales Network for any further information. Published by New Holland Brand Communications. Bts Adv. - Printed in Italy - 02/08 - TP01 - (Turin)



60018/INB

ASK FOR A TEST DRIVE!

New Holland prefers **AMBITA** lubricants